


ISS.	MN/PRN/DN	ACTION	APPR'D	DATE
1	DN/E/144	JP		
-	-	-	-	-
-	-	-	-	-

ELECTRICAL REQUIREMENTS

MAINS INPUT	100-240Vac, 50-60Hz ALL MODELS
SYSTEM VOLTAGE	24 Vdc
POWER CONSUMPTION DURING RECIRCULATION	60 VA
POWER CONSUMPTION DURING DISPENSE	75 VA
FUSES	2 x T6.3 AMP
RESERVOIR LEVEL CONNECTION	JACK PLUG 3.5 mm
NOISE LEVEL	<40 dBA




UNIT WEIGHTS

UNIT	WEIGHT
DI	14.0KG (30.8LB)
UV	14.5KG (32.0LB)
UF	14.5KG (32.0LB)
UVF	15.0KG (33.1LB)

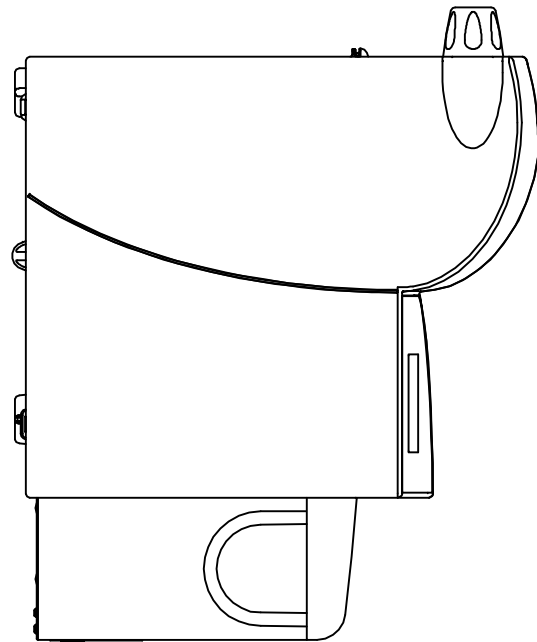


CONNECTION DETAILS.

REF	FUNCTION	DETAILS	DI	UV	UF	UVF
A	INLET- FEED WATER	8mm OD (5/16") TUBE CONNECTOR	✓	✓	✓	✓
C	DRAIN - UF FLUSH	8mm OD (5/16") TUBE CONNECTOR	—	—	✓	✓
D	DISPENSE	8mm OD (5/16") TUBE CONNECTOR	✓	✓	✓	✓

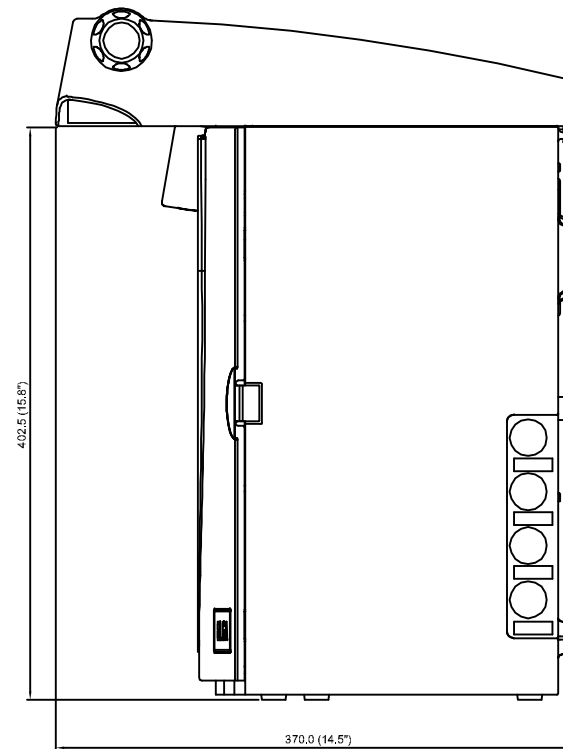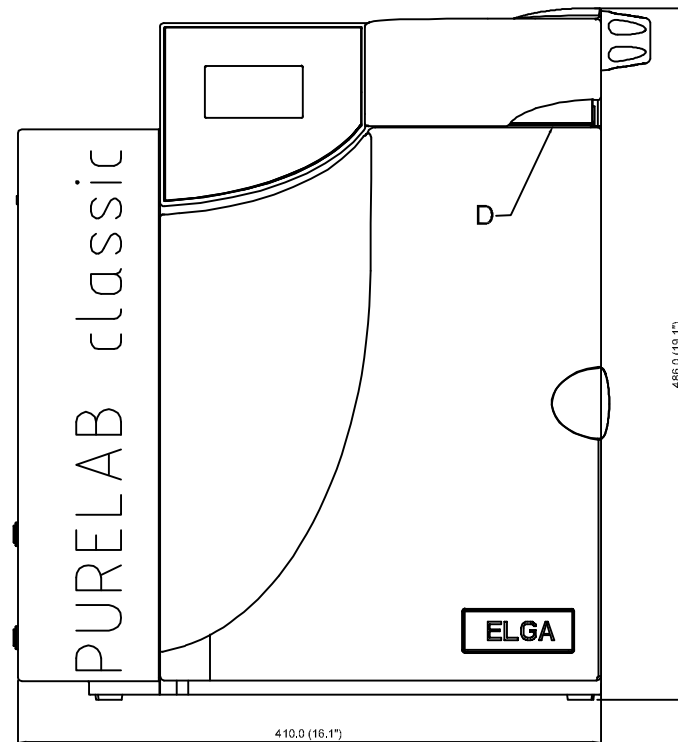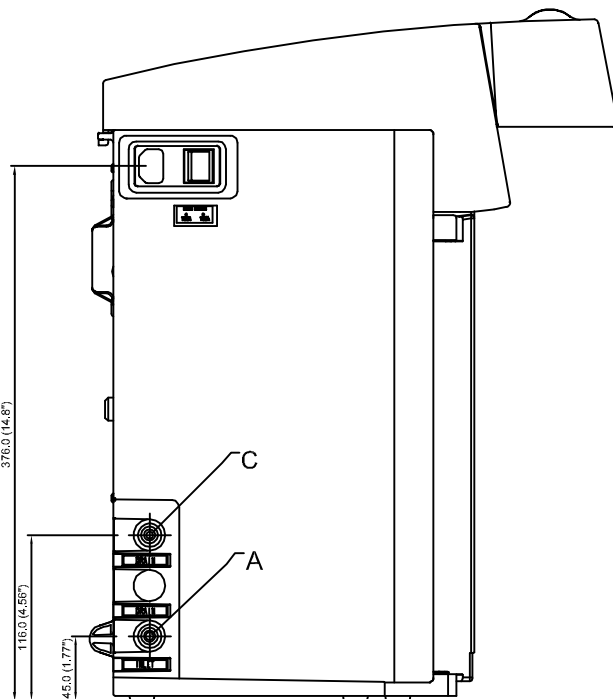

IF IN DOUBT-ASK



3rd ANGLE PROJECTION DO NOT SCALE

MATERIAL: N/A

FINISH: N/A

GENERAL NOTE: N/A

TOLERANCES UNLESS STATED:
 ONE PLACE DEC. ± N/A ANGULAR ± 0.5°
 TWO PLACE DEC. ± ALL HOLE TOLS. TO BS.4500 H11

DIMS. IN mm	SCALE	DRAWN	JP	AUG 11	DATE
	NTS	CHECKED	SB	AUG 11	
SIZE: A3		APPROVED	LU	AUG 11	

TITLE
**SALES DIAGRAM
 OUTLINE & CONN'N
 PURELAB CLASSIC
 RANGE**

PART NUMBER: N/A

ELGA

www.elgalabwater.com

info@elgalabwater.com

ELGA is the laboratory water brand of Veolia Water Solutions & Technologies.

DRG. NO.	SD_CL_001	ISSUE	1
SHEET No.1 OF 3			

THIS DRAWING IS THE PROPERTY OF ELGA Labwater. THE DETAILS SHOWN ARE STRICTLY CONFIDENTIAL AND MUST NOT BE DISCLOSED TO ANY THIRD PARTY WITHOUT THE CONSENT OF VWS (UK) LTD.